

MCD


DIRECT OPERATED PRESSURE RELIEF VALVE

SERIES 51


MODULAR VERSION ISO 4401-03

p max **350** bar
Q max (see table of performances)

MOUNTING INTERFACE

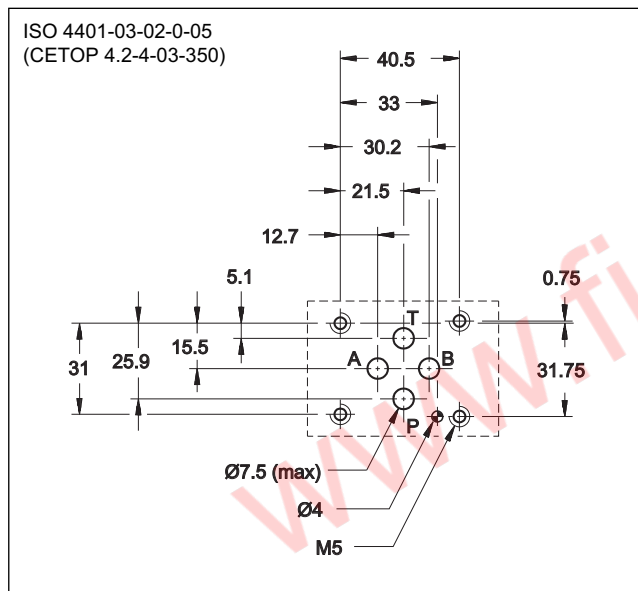

OPERATING PRINCIPLE

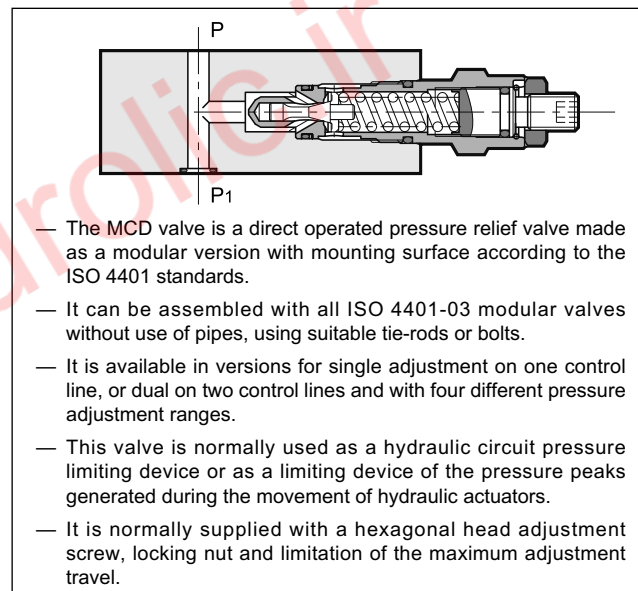

CONFIGURATIONS (see hydraulic symbols table)


- “SP”: controls the pressure on line P with discharge in T
- “SAT”: controls the pressure on line A with discharge in T
- “SBT”: controls the pressure on line B with discharge in T

- “DT”: controls the pressure on lines A-B with discharge in T
- “D”: controls the pressure on lines A-B with crossed discharges
- “SB”: controls the pressure on line B with discharge in A

PERFORMANCES (measured with mineral oil of viscosity 36cSt at 50°C)

Maximum operating pressure	bar	350
Minimum controlled pressure	see Δp diagram	
Maximum flow rate in controlled lines	l/min	50
Maximum flow rate in the free lines		75
Ambient temperature range	°C	-20 / +60
Fluid temperature range	°C	-20 / +80
Fluid viscosity range	cSt	10 ÷ 400
Fluid contamination degree	According to ISO 4406:1999 class 20/18/15	
Recommended viscosity	cSt	25
Mass: MCD-SP / MCD-SAT / MCD-SBT / MCD-SB / MCD-DT / MCD-D	kg	1,4 2,0


HYDRAULIC SYMBOLS

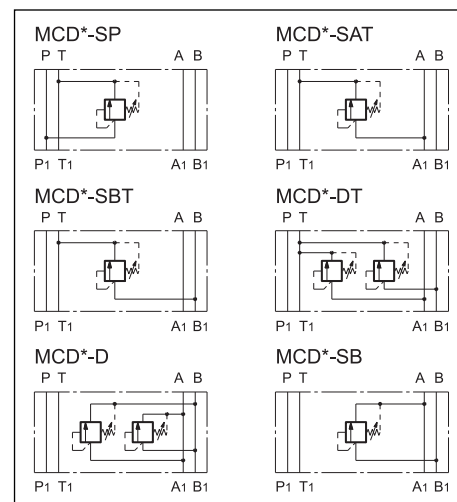

1 - IDENTIFICATION CODE

M	C	D	-	/ 51	/	
Size: ISO 4401-03	Modular version	Direct operated pressure relief valve	Pressure adjustment range	Seals:	Omit for adjustment with countersunk hex screw - standard	
2 = up to 25 bar	5 = up to 210 bar	3 = up to 70 bar	6 = up to 350 bar	N = NBR seals for mineral oils (standard)	K = Adjustment knob	
4 = up to 140 bar				V = FPM seals for special fluids		
Configurations:				Series No. (the overall and mounting dimensions remain unchanged from 50 to 59)		
SP: single on line P with discharge in T				DT: double on lines A-B with discharge in T		
SAT: single on line A with discharge in T				D: double on lines A-B with crossed discharges		
SBT: single on line B with discharge in T				SB: single on line B with discharge in A		

2 - CHARACTERISTIC CURVES (values obtained with viscosity of 36 cSt at 50°C)

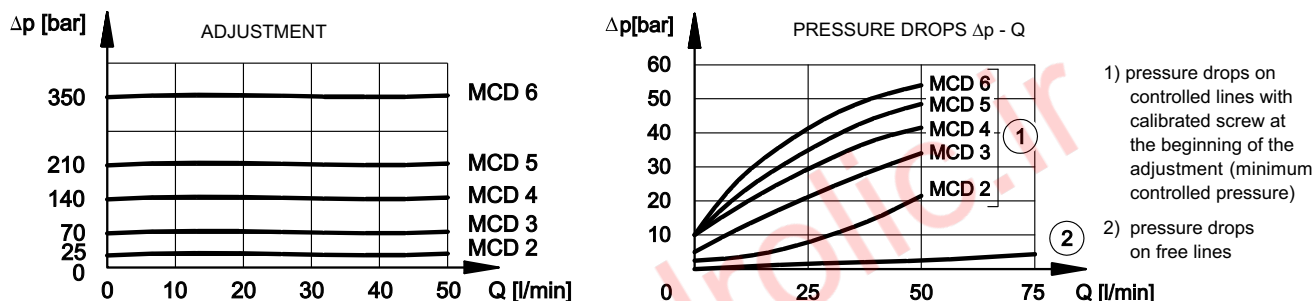

3 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals. For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics.

The fluid must be preserved in its physical and chemical characteristics.

4 - OVERALL AND MOUNTING DIMENSIONS

